



Film-faced plywood NORDECO

December 2024

Prepared by Yulia Ermakova, NORDECO PLYWOOD Marketing Director



Film-faced plywood NORDECO – 100% birch plywood with a wide range of applications

ENDURES MORE
LASTS LONGER



- Formwork
- Concrete block production
- Commercial vehicles
- Boats
- Children's and sports playgrounds
- Transportation and storage systems
- Work tables, fixtures
- Street furniture
- Retail equipment



Moisture-resistant, durable, wear-resistant, resistant to environmental influences

FILM-FACED PLYWOOD NORDECO | 100% Nordic birch | Water-resistant | Wear-resistant | Enduring | Resistant to chemically aggressive environment and temperature changes





Manufactured on a new 20-opening lamination press by professionals with decades of experience





For formwork, concrete blocks production

INTER-FLOOR CONSTRUCTION



WALLS



GROUNDWORKS



LARGE-PANEL FORMWORK



SMALL-PANEL FORMWORK



MOLDS FOR FOAM CONCRETE, AEROCRETE





For commercial vehicles

BOX BODIES



TILT-COVERED VANS



LCV



TRAILERS, SEMITRAILERS



PLATFORM TRAILERS



TOOL BOXES





For boats

BENCHES



TRANSOMS



TABLES



LOCKERS





For children's and sports playgrounds

SKATE PARK RAMPS



BASKETBALL BACKBOARDS



TENNIS TABLES



PARKOUR SITES



HOCKEY BOXES



TRIBUNES





For transport and storage systems

CASES FOR MUSICAL INSTRUMENTS



CASES-CABINETS FOR PROPS



RACKS



CASES FOR STAGE EQUIPMENT



TRANSFORMER CASES WORKPLACE



CASES FOR LIGHTING EQUIPMENT AND SWITCHING





For outdoor furniture

GARDEN FURNITURE



STOOLS



TABLES



BENCHES






For work tables, fixtures


FOLDING WORKBENCHES




HONEYCOMB TABLES, TABLE TOPS

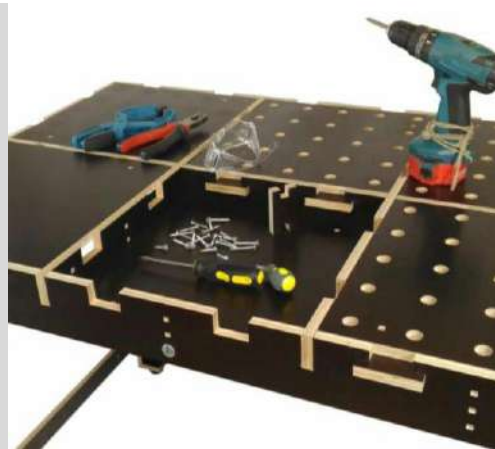


MILLING-CIRCULAR TABLES

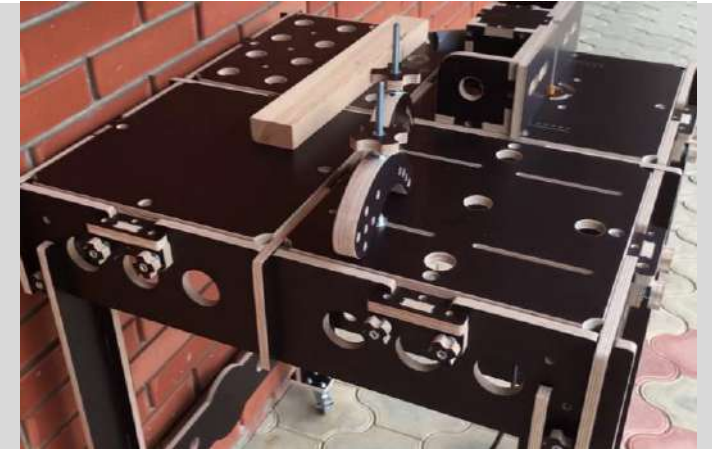


CLAMPS

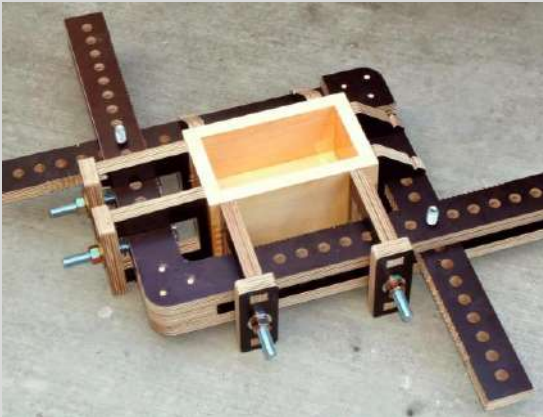

TOOL ORGANIZERS

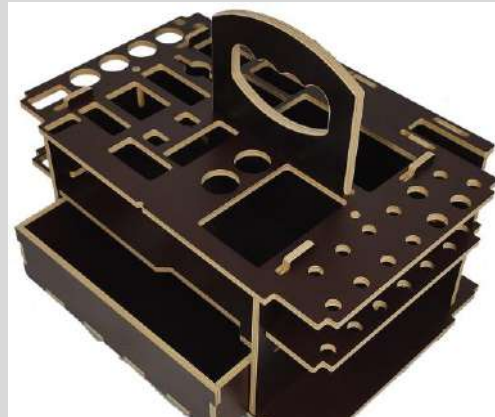

DEVICES FOR GROOVE CUTTING AND DOMINO TENSION INSERTION

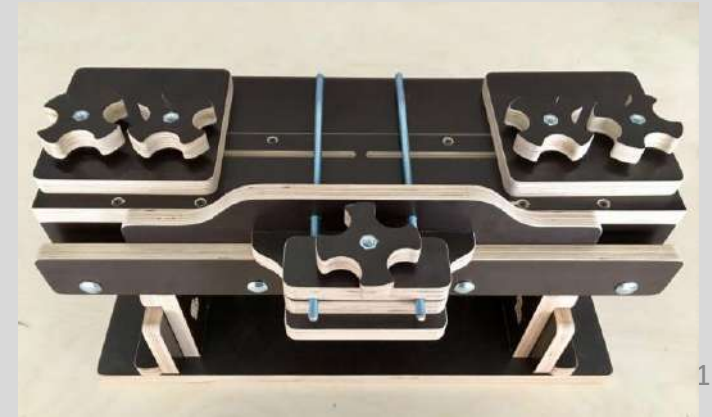



For retail equipments

COUNTERS



BOXES





Available to order any size from 4'x8' to 5'x13'

TECHNICAL CHARACTERISTICS	
Thickness, mm	9-40
Surface type	Smooth/smooth (F/F)
Film density, g/m ²	120, 220
Formaldehyde emission class	E0.5
Wear resistance of the film, cycles in Taber abrasion test	≥400
Water resistance	High
Plywood density, kg/m ³	640-700
Moisture content, %	≤12
Edge sealing	Acryl-based water resistant paint, dark brown

SIZES
Standard sizes, mm (ft)
1220x2440, 1250x2500 (4x8)
1220x3000, 1220x3300 (4x10)
1525x2500 (5x8)
1500x3000 (5x10)
1500x3300, 1525x3300 (5x11)
1525x4000 (5x13)

THICKNESS AND NUMBER OF PLYS			
Thickness mm	Number of plies	Tolerances on nominal thickness, mm	Tolerance on thickness within one panel, mm
9	7	+0.4/-0.6	0.6
12	9	+0.5/-0.7	
15	11	+0.6/-0.8	
18	13	+0.7/-0.9	
21	15	+0.8/-1.0	
24	17	+0.9/-1.1	1.0
27	19	+1.0/-1.2	
30	21	+1.1/-1.3	
35	25	+1.3/-1.5	
40	28	+1.4/-1.6	

COMPLIANCE

E0,5 CE CARB EPA



Transportation plywood NORDECO Truck – direct deliveries from the producer

Producer: Plitwood LLC., Russia,
162040, Vologda region, Vokhtoga settlement,
Zheleznodorozhnaya str., 83

Sales Department:

+7 (921) 821 87 48 (export)
+7 (921) 935 75 43 (Russia, CIS)
sales@plitwood.ru



nord.eco