



Transportation plywood NORDECO Truck

June 2025

Prepared by Yulia Ermakova, NORDECO PLYWOOD Marketing Director



Transportation plywood NORDECO Truck – 100% birch plywood with anti-slip surface

Floors in commercial vehicles,
busses and cargo platforms



ENDURES MORE
LASTS LONGER





Water-resistant and durable for reliable floor operation

TRANSPORTATION PLYWOOD NORDECO TRUCK | 100% Nordic birch | Water-resistant | Wear-resistant | Slip-proof | Enduring



With logo



Without logo



**Manufactured on a new 20-opening lamination press
by professionals with decades of experience**





For commercial vehicles products

PLATFORM TRAILERS



CURTAINSIDERS



BOX BODIES



Flooring, impact protection for the front wall, impact protection for the sides





For responsible applications, where safe and reliable floor operation is required


PASSENGER BUSES



MINIBUSES



SLATS, TRANSOMS AND BENCHES FOR PVC BOATS

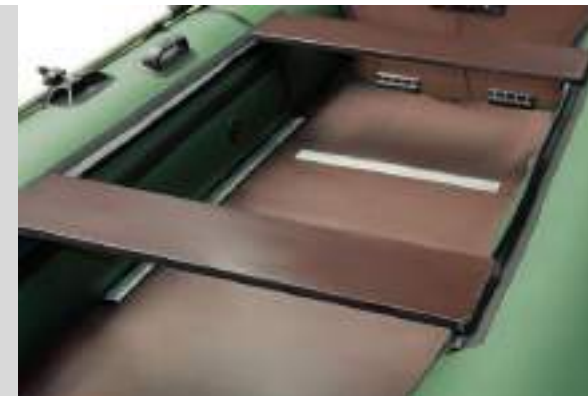

CHILDREN'S AND SPORTS PLAYGROUNDS



CONCERT AND STAGE AREAS



CONSTRUCTION SCAFFOLDING





Available to order in 2025: 4'x8' and 5'x10', as well as cut-to-size products from July 2025

TECHNICAL CHARACTERISTICS		SIZES	THICKNESS AND NUMBER OF PLIES				PHYSICAL AND MECHANICAL PROPERTIES	
Thickness, mm	9-40	Standard sizes, mm (ft)	Thickness mm	Number of plies	Tolerances on nominal thickness, mm	Tolerance on thickness within one panel, mm	Ultimate bending strength:	
Surface type	Smooth/wire mesh (F/W)	1220x2440, 1250x2500 (4x8)	9	7	+0.4/-0.6	0.6	along the grain, MPa, min	40
Film density, g/m ²	120, 220	1220x3000, 1220x3300 (4x10)	12	9	+0.5/-0.7		across the grain, MPa, min	30
Formaldehyde emission class	E0.5	1525x2500 (5x8)	15	11	+0.6/-0.8		Modulus of elasticity in static bending:	
Wear resistance of the film (F), cycles in Taber abrasion test	≥400	1500x3000 (5x10)	18	13	+0.7/-0.9		along the grain, MPa, min	6 000
Water resistance	High	1500x3300, 1525x3300 (5x11)	21	15	+0.8/-1.0		across the grain, MPa, min	3 000
Plywood density, kg/m ³	640-700	1525x4000 (5x13)	24	17	+0.9/-1.1	1.0	Wear resistance of the film (W), cycles in Taber abrasion test	≥300
Moisture content, %	≤12		27	19	+1.0/-1.2		Bond strength of the overlay to plywood	The overlay shall not delaminate at the intersection point of two incisions/cuts
Edge sealing	Waterproof acrylic paint dark brown color		30	21	+1.1/-1.3			
			35	25	+1.3/-1.5			
			40	28	+1.4/-1.6			

COMPLIANCE

E0.5

CE

CARB

EPA





Transportation plywood NORDECO Truck – direct deliveries from the producer

Producer: Plitwood LLC., Russia,
162040, Vologda region, Vokhtoga settlement,
Zheleznodorozhnaya str., 83

Sales Department:
+7 (921) 832 02 92
sales@plitwood.ru



en.nord.eco